



Movement Joints (UK) Ltd

P O Box 10, Wisbech, Cambridgeshire PE13 4AN
 Tel: 01945 450736 Fax: 01945 450819
 Web: www.mjuk.co.uk
 e-mail: info@mjuk.co.uk

830 series

Floor Profiles

For joints widths greater than 100mm

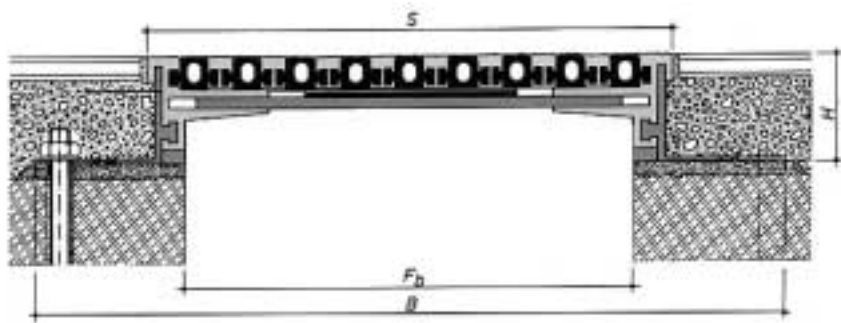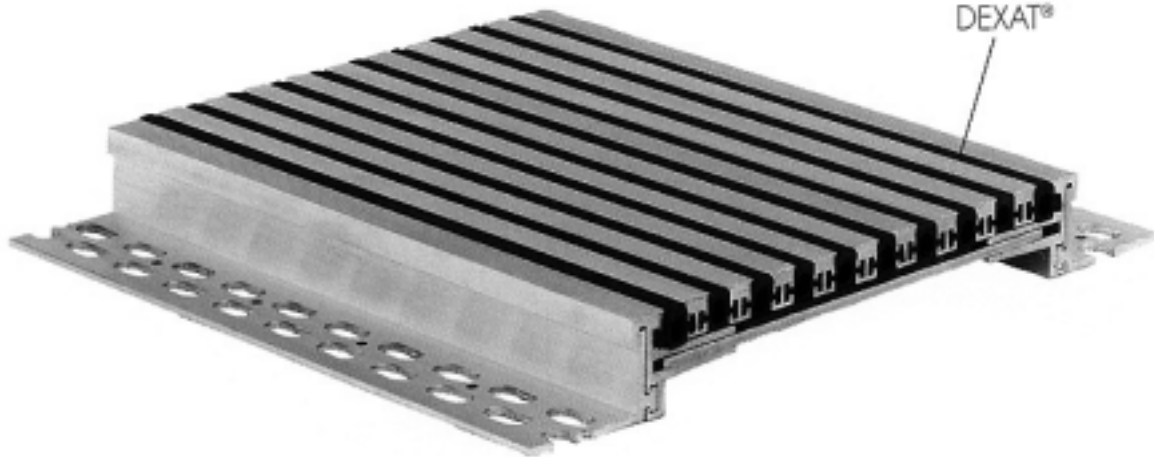

Also available as a corner profile

Profile Number	830-120	830-160	830-210	830-260	830-310
Fb - Joint widths up to (mm)	120	160	210	260	310
H - Heights (mm)	35 / 40* / 50 / 55* / 60 / 80				
B - Overall width (mm)	225 / 245*	260 / 280*	330 / 350*	375 / 395*	30 / 455*
S - Visible width (mm)	140	170	240	280	320
Accommodation of movement (mm)	30 (+/- 15)	40 (- 15 / + 25)	45 (- 15 / + 30)	50 (-15 / + 35)	60 (- 20 / + 40)
Colours	Black, grey				
Material	Aluminium, Nitriflex®				
Standard Length (metres)	4				
Load Bearing capacity (kN)					

Applications: For all finishes (Screed, natural stone, cast stone etc), for use with wide joints and in mining or subsidence areas

Profile characteristics: smooth surface, attractive design

Profile installation: See tips for planning and installation

IMPORTANT
 Whilst all reasonable care is taken in compiling technical data on the company's products, all recommendations or suggestions regarding the use of such products are made without guarantee since the conditions of use are beyond the company. It is the customers responsibility to satisfy himself that each product is fit for the purpose for which he intends to use it and that the actual conditions of use are suitable.

