



Movement Joints (UK) Ltd

P O Box 10, Wisbech, Cambridgeshire PE13 4AN
 Tel: 01945 450736 Fax: 01945 450819
 Web: www.mjuk.co.uk
 e-mail: info@mjuk.co.uk

840 series

Floor Profiles

For joints widths greater than 100mm

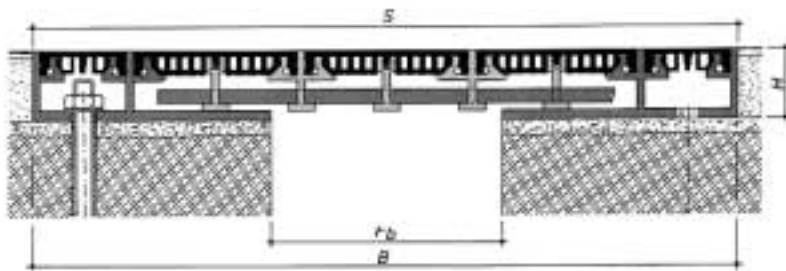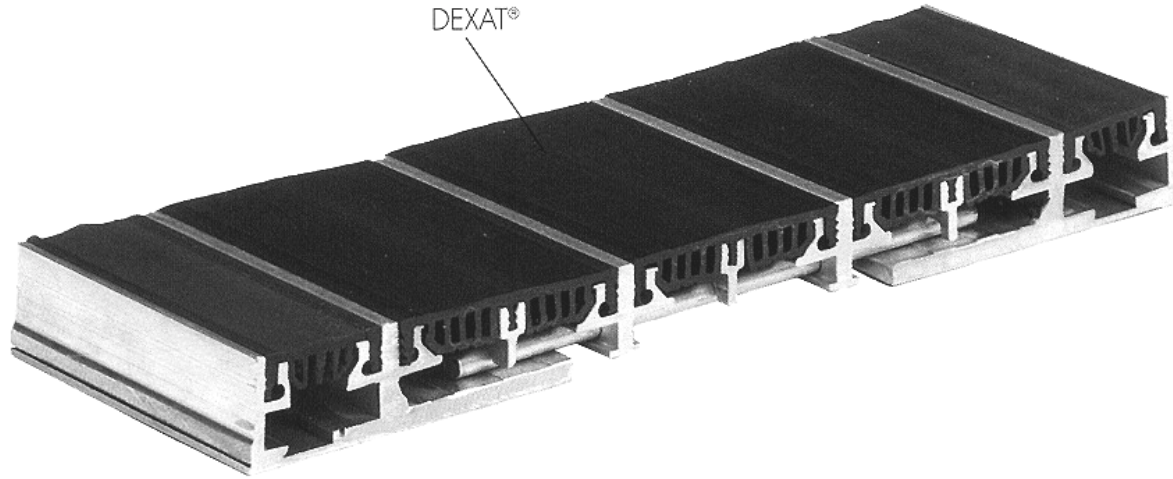

Also available as a corner profile

Profile Number	840-120	840-160	840-200	840-240	840-320	840-400
Fb - Joint widths up to (mm)	120	160	200	260	320	400
H - Heights (mm)	30					
B - Overall width (mm)	300	340	380	440	500	580
S - Visible width (mm)	300	340	380	440	500	580
Accommodation of movement (mm)	60 (+/- 30)	80 (+/- 40)	100 (+/- 50)	130 (+/- 65)	160 (+/- 80)	200 (+/- 100)
Colours	Black, grey					
Material	Aluminium, Nitriflex®					
Standard Length (metres)	4					
Load Bearing capacity (kN)						

Applications: For all finishes (Screed, natural stone, cast stone etc), for use with wide joints and in mining or subsidence areas

Profile characteristics: Absorption of vertical movement, attractive design

Profile installation: See tips for planning and installation

IMPORTANT
 Whilst all reasonable care is taken in compiling technical data on the company's products, all recommendations or suggestions regarding the use of such products are made without guarantee since the conditions of use are beyond the company. It is the customers responsibility to satisfy himself that each product is fit for the purpose for which he intends to use it and that the actual conditions of use are suitable.

